I411. ECOLight Stadium Precinct

I411.1. Precinct description

The ECOLight Stadium Precinct provides specific planning controls for the use of ECOLight Stadium. ECOLight Stadium is located in Pukekohe and is currently the home of Counties Manukau Rugby Union Steelers.

The zoning of the land within the ECOLight Stadium Precinct is Special Purpose - Major Recreation Facility Zone. Refer to the planning maps for the location and extent of the precinct.

I411.2. Objectives

- (1) The ECOLight Stadium is protected as a regionally and nationally important venue for organised sports and recreation, and informal recreation.
- (2) A range of activities compatible with, or accessory to, the primary activities are enabled.
- (3) The adverse effects of the operation of the ECOLight Stadium are avoided, remedied or mitigated as far as is practicable recognising that the primary activities will by virtue of their nature, character, scale and intensity, generate adverse effects on surrounding land uses which are not able to be fully internalised.

I411.3. Policies

- (1) Enable the safe and efficient operation of the ECOLight Stadium for its primary activities.
- (2) Protect the primary activities of the ECOLight Stadium from the reverse sensitivity effects of adjacent development.
- (3) Enable a range of accessory and compatible activities where they achieve all of the following:
 - (a) avoid, remedy or mitigate adverse effects; and
 - (b) are of a character and scale which will not displace the primary activities.
- (4) Manage the adverse effects of the operation of the ECOLight Stadium, having regard to the amenity of surrounding properties.
- (5) Recognise that the ECOLight Stadium's primary activities may generate adverse effects that are not able to be fully internalised and may need to be further mitigated by limiting or controlling their scheduling, duration and frequency.

I411.4. Activity table

The provisions in any relevant overlays and Auckland-wide apply in this precinct unless otherwise specified below.

(1) E24 Lighting

- (2) E25 Noise and vibration (noise provisions only);
- (3) E40 Temporary activities;

Table I411.4.1 specifies the activity status of land use and development activities in the ECOLight Stadium Precinct pursuant to section 9(3) of the Resource Management Act 1991.

| | Activity | Activity status |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Use | | |
| (A1) | Organised sport and recreation | Р |
| (A2) | Informal recreation | Р |
| (A3) | Any primary activity not meeting Standard I411.6.5 but meeting all other standards | С |
| Accessory a | ictivities | |
| (A4) | Accessory activities | Р |
| (A5) | Any accessory activity not meeting Standard I411.6.5 but meeting all other standards | С |
| Compatible | activities | |
| (A6) | Concerts, events and festivals | Р |
| (A7) | Markets, fairs and trade fairs | Р |
| (A8) | Functions, conferences, gatherings and meetings | Р |
| (A9) | Displays and exhibitions | Р |
| (A10) | Sports, recreation and community activities | Р |
| (A11) | Professional fireworks displays meeting Standard I411.6.10 | Р |
| (A12) | Professional fireworks displays not meeting Standard I411.6.10 | RD |
| (A13) | Helicopter flights meeting Standard I411.6.11 | Р |
| (A14) | Helicopter flights not meeting Standard I411.6.11 | RD |
| (A15) | Filming activities | Р |
| (A16) | Any compatible activity not meeting Standard I411.6.5 but meeting all other standards | С |
| Developmer | nt | |
| (A17) | New buildings, external building alterations or additions to a building for a primary, compatible, or accessory activity up to 15m in height | Р |
| (A18) | New buildings, external building alterations or additions to a building for a primary, compatible, or accessory activity greater than 15m but up to 20m in height | RD |

Table I411.4.1: Activity table

| (A19) | New buildings, external building alterations or additions to a building for a primary, compatible, or accessory activity greater than 20m in height | D |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| (A20) | New buildings, building alterations or additions to a building for a primary, compatible, or accessory activity not meeting Standard I411.6.8 | RD |
| (A21) | Light towers and associated fittings up to and greater than 20m in height | Р |
| (A22) | Demolition of buildings | Р |
| (A23) | Temporary buildings | Р |
| (A24) | Workers' accommodation | Р |

I411.5. Notification

- (1) An application for resource consent for a controlled activity listed in Table 1411.4.1 Activity table above will be considered without public or limited notification or the need to obtain written approval from affected parties unless the Council decides that special circumstances exist under section 95A(4) of the Resource Management Act 1991.
- (2) Any application for resource consent for an activity listed in Table I411.4.1 Activity table and which is not listed in I411.5(1) will be subject to the normal tests for notification under the relevant sections of the Resource Management Act 1991.
- (3) When deciding who is an affected person in relation to any activity for the purposes of section 95E of the Resource Management Act 1991 the Council will give specific consideration to those persons listed in Rule C1.13(4).

I411.6. Standards

The overlay and Auckland-wide standards apply in this precinct, unless otherwise specified below. The following standards do not apply:

- (1) E27 Transport Standard E27.6.1 Trip generation; and
- (2) E27 Transport Standard E27.6.2 Number of parking and loading spaces.

All permitted, controlled or restricted discretionary activities listed in Table I411.4.1 must comply with the following activity standards unless otherwise stated.

I411.6.1. Noise

(1) The noise (rating) level from any activity as measured within the boundary of any site containing activity sensitive to noise must not exceed the noise limits in Table I411.6.1.1 Noise standards.

Table I411.6.1.1: Noise standards

| Time, day, duration and frequency | Noise limit |
|----------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| Up to 5 special noise events between 8:00am and 10:30pm in any 12 month period | 75dB L _{Aeq(5min)} |
| Up to 15 special noise events between 8:00am and 10:30pm in any 12 month period | 65dB L _{Aeq(5min)} |
| General noise standards for all days including Christmas Day, Good Friday & Anzac Day, between 8:00am and 10:30pm | 55dB L _{Aeq} |
| General noise standards for all other times | 40dB L_{Aeq} and 70dB L_{Amax} |

- (2) Noise limits must be measured in accordance with NZS 6801:2008 Acoustics – Measurement of Environmental Sound and assessed in accordance with NZS 6802:2008 Acoustics – Environmental Noise.
- (3) For special noise events an adjustment must not be applied to amplified music or amplified voice sounds containing special audible characteristics (with respect to section 6.3 of NZS6802:2008) but other sources of sound may have an adjustment applied if necessary in accordance with the same section.
- (4) The prescribed time frames for the purpose of assessment according to NZS6802:2008 must be the timeframe for which any particular noise limit applies.
- (5) Crowd noise is to be excluded from any assessment of compliance with these limits.
- (6) Where L_{Aeq (5min)}, is specified, no 5 minute measurement sample can exceed the stated limit.
- (7) Professional fireworks displays and helicopter flights are excluded from this standard.

I411.6.2. Lighting

- (1) Lighting limits must be measured and assessed in accordance with Standard AS 4282-1997 (Control of the Obtrusive Effects of Outdoor Lighting). In the event of any conflict between these documents and the lighting standards set out below, the below standards will prevail.
- (2) Any calculation must be based on a maintenance factor of 1.0 (i.e. no depreciation).

- (3) Where measurements of any illuminance above background levels from the use of artificial lighting cannot be made because the owner will not turn off artificial lighting, measurements may be made in areas of a similar nature that are not affected by the artificial light. The result of these measures may be used for determining the effect of the artificial light.
- (4) For the purposes of Standard I411.6.2, the curfew and pre-curfew times are as stated in Table I411.6.2.1 Pre-curfew and curfew times.

Table I411.6.2.1: Pre-curfew and curfew times

| | Times |
|------------|------------------|
| Pre-curfew | 7.00am – 10.30pm |
| Curfew | 10.30pm – 7.00am |

- (5) The added illuminance from the use of any artificial lighting on any site must not exceed either one of the following;
 - (a) the limits in Table I411.6.2.2 Horizontal and vertical illuminance at a boundary when measured at the boundary of any adjacent site containing a lawfully established dwelling. The illuminance limit will apply horizontally and vertically at any point on the boundary and at any height; or

Table I411.6.2.2: Horizontal and vertical illuminance at a boundary

| | Illuminance limit |
|------------|--------------------------------------|
| Pre-curfew | 100 lux (above the background level) |
| Curfew | 10 lux (above the background level) |

(b) The vertical illuminance limits in Table I411.6.2.3 Vertical illuminance at a window when measured at the windows of habitable rooms of a lawfully established dwelling.

Table I411.6.2.3: Vertical illuminance at a window

| | Vertical illuminance limit |
|------------|----------------------------|
| Pre-curfew | 10 lux |
| Curfew | 2 lux |

(6) Outdoor artificial lighting operating on any site between sunset and sunrise must not exceed a threshold increment limit of 15 per cent (based on an

adaption luminance of 2cd/m²) on any public road, calculated within each traffic lane in the direction of travel.

(7) Any exterior lighting must be selected, located, aimed, adjusted and/or screened to ensure that glare resulting from the lighting does not exceed the applicable limits for pre-curfew times in Table I411.6.2.4 Pre-curfew luminous intensity and 1,000 candelas for curfew times at the windows of habitable rooms of a lawfully established dwelling or at the boundary of any residential site where a dwelling does not yet exist.

Table I411.6.2.4: Pre-curfew luminous intensity

| | Pre-curfew luminous intensity limit |
|-------------------------|-------------------------------------|
| Standard | 10,000 cd |
| Special lighting events | 25,000 cd |

- (8) The average surface luminance for an intentionally artificially lit building façade must not exceed the limits in Table I411.6.2.5 Building façade luminance. The values may be determined by calculation or measurement in accordance with CIE 150:2003 (Guide on the limitation of the effects of obtrusive light from outdoor lighting installations) – International Commission on Illumination ISBN 3 901 906 19 3.
- (9) Professional fireworks displays are excluded from this standard.

Table I411.6.2.5: Building façade luminance

| | Luminance limit |
|-------------------------|----------------------|
| Standard | 10 cd/m ² |
| Special lighting events | 25 cd/m ² |

I411.6.3. Special noise events

- (1) The total number of special noise events in any 12 month period must not exceed 20 events.
- (2) For the purpose of this standard, a special noise event exceeds the standard noise limits but does not exceed the special noise limits listed in Table 1411.6.1.1 Noise standards.
- (3) Special noise events may occur consecutively over a day or days, but may not exceed the total number of special noise events allowed in any 12 month period provided that:
 - (a) there must be no more than two special noise events on any one day.

- (b) there must be no more than four special noise events within any two week period.
- (4) A single special noise event must be limited to a total duration of six hours. Any special noise event lasting longer than six hours must be counted as two special noise events. The duration of a special noise event must be determined by the cumulative length of time that the standard noise limits are exceeded.

I411.6.4. Special lighting events

- (1) The total number of special lighting events in any 12 month period must not exceed 25 events.
- (2) For the purpose of this standard, a special lighting event exceeds the standard lighting limits but does not exceed the special lighting limits listed in Tables I411.6.2.4 Pre-curfew luminous intensity and I411.6.2.5 Building façade luminance.

I411.6.5. Traffic management

Activities must meet at least one of the following traffic management standards:

- (1) The activity and management of associated transport and traffic effects is undertaken in accordance with a Transport and Traffic Management Plan authorised by Auckland Transport; or
- (2) The activity generates a crowd of less than 5,000 people and does not require the closure of a public road.

I411.6.6. Parking

(1) Any loss of existing formed and marked parking spaces from 30 September 2013, must be accommodated elsewhere within the precinct unless the number of parking spaces provided exceeds the requirements set out in E27 Transport – district rule E27.6.2 Number of parking and loading spaces.

I411.6.7. Screening

(1) Any outdoor storage or rubbish collection areas that are visible from a residential zone or an open space zone must be screened from those areas.

I411.6.8. Interface control areas

(1) New buildings, external building alterations or additions to a building must be located outside the Interface Control Area (ICA) as illustrated on the precinct plan. Temporary buildings are excluded from this standard.

I411.6.9. Height in relation to boundary

- (1) Where the ECOLight Stadium Precinct directly adjoins another zone, the height in relation to boundary standard that applies in the adjoining zone applies to the adjoining ECOLight Stadium Precinct boundary.
- (2) Where the ECOLight Stadium Precinct directly adjoins a road or a zone with no height in relation to boundary standard, buildings must not project

buildings must not project beyond a 45 degree recession plane measured from a point 8.5 metres vertically above ground level along the precinct boundary.

(3) Temporary buildings, light towers and associated fittings are excluded from this standard.

I411.6.10. Professional fireworks displays

- (1) Displays are limited to 3 in any 12 month period.
- (2) Displays must not exceed 15 minutes in duration.
- (3) Displays must be finished by 10:30pm.
- (4) Fireworks must be discharged at least 120 metres from any residential zone.
- (5) Displays must comply with 140dB L_{Zpeak} at any point in the audience area and within the boundary of any activity sensitive to noise.

I411.6.11. Helicopter flights

- (1) There must be no more than 30 helicopter movements in any 12 month period and 10 on any day (where an arriving flight and a departing flight comprises two movements).
- (2) Landing and departures must take place at least 150 metres from any neighbouring site.

I411.6.12. Temporary buildings

(1) Temporary buildings must be erected for a continuous period of no greater than 90 days, excluding set up and dismantling time.

I411.7. Assessment – controlled activities

I411.7.1. Matters of control

The Council will consider the relevant assessment criteria below for controlled activities, in addition to the assessment criteria specified for the relevant controlled activities in the overlay or Auckland-wide provisions:

(1) the effects of the proposed activity on the safety and efficiency of the transport network.

I411.7.2. Assessment criteria

The Council will consider the relevant assessment criteria below for controlled activities, in addition to the assessment criteria specified for the relevant activities in the overlay and Auckland-wide provisions:

- (1) effects on the safety and efficiency of the transport network:
 - (a) the extent to which there are likely to be adverse effects on the safe and efficient operation of the transport network and pedestrian movements;
 - (b) the extent to which entry and exit points to the precinct will be managed to accommodate traffic and pedestrian movements; and

(c) the extent to which any proposed mitigation measures will address adverse traffic and parking effects. Such measures may include travel planning, providing alternatives to private vehicle trips and the preparation and implementation of a Transport and Traffic Management Plan (prepared by a suitably qualified and experienced person).

I411.8. Assessment – restricted discretionary activities

I411.8.1. Matters of discretion

The Council will restrict its discretion to the following matters when assessing a restricted discretionary activity resource consent application, in addition to the matters specified for the relevant activities in the overlay and Auckland-wide provisions:

- (1) any activity that does not comply with noise and/or lighting standards:
 - (a) the effects of non-compliance with a noise and/or lighting standard on the amenity values of surrounding properties and safety of transport networks.
- (2) any activity that does not comply with permitted helicopter flight standards:
 - (a) the effects of non-compliance with the permitted helicopter flight standards on the amenity of surrounding properties.
- (3) any activity that does not comply with permitted professional fireworks display standards:
 - (a) the effects of non-compliance with the permitted fireworks display standard on the amenity of surrounding properties.
- (4) any new buildings, external building alterations or additions to a building for a primary, compatible, or accessory activity greater than 15 metres and up to 20 metres in height and/or which does not comply with height in relation to boundary standards:
 - (a) the visual effects of the additional bulk and scale of buildings on the amenity of private properties, streets and public open spaces.
- (5) new buildings, external building alterations or additions to a building for a primary, compatible, or accessory activity not meeting Standard I411.6.8 Interface control areas:
 - (a) the visual effects of the building design and external appearance on the amenity of private properties, streets and public open spaces.
- (6) any activity that does not comply with screening standards:
 - (a) the visual effects of rubbish and storage areas on residential and open space zoned sites.

I411.8.2. Assessment criteria

The Council will consider the relevant assessment criteria below for restricted discretionary activities, in addition to the assessment criteria specified for the relevant activities in the overlay and Auckland-wide provisions:

- (1) the effects of non-compliance with a noise and/or lighting standard on the amenity values of surrounding properties and safety of transport networks:
 - (a) whether the effects of the activity will give rise to noise effects that are unreasonable, having regard to all of the following:
 - the cumulative noise effects of other activities which are permitted on the site;
 - (ii) the cumulative effect of numerous infringements of noise standards; and,
 - (iii) the degree of non-compliance;
 - (b) whether people likely to be affected by the exceedance of noise standards will be given reasonable notice of the likely effects of the infringement including start time and end time;
 - (c) the extent to which duration and hours of operation are managed to minimise the effects of the infringement having regard to the operational requirements and reason for the infringement;
 - (d) the extent to which any artificial lighting will create a traffic safety issue;
 - (e) whether the number, placement, design, height, colour, orientation and screening of light fittings and light support structures minimise light spill, glare, and loss of night time viewing;
 - (f) the extent to which the amount of light falling into habitable rooms of during the hours of darkness is minimised to control effects on indoor amenity and sleep disturbance;
 - (g) whether the artificial lighting is necessary, suitable and adequately protects the amenity of the surrounding environment; and
 - (h) the extent to which additional special events adversely affect the amenity of surrounding properties having regard to all of the following:
 - (i) the sensitivity of the surrounding environment;
 - (ii) the cumulative effect of numerous infringements of special event standards;
 - (iii) the additional number of special events; and
 - (iv) whether there is an operational need for the exceedance.


- (2) the effects of non-compliance with the permitted helicopter flight and/or fireworks display standard on the amenity of surrounding properties:
 - (a) the extent to which the additional activities adversely affect the amenity of surrounding properties, having regard to all of the following:
 - (i) the sensitivity of the surrounding environment;
 - (ii) the cumulative effect of numerous infringements of this standard;
 - (iii) the additional number of activities; and
 - (iv) whether there is an operational need for the exceedance.
- (3) the visual effects of the additional bulk and scale of buildings on the amenity of private properties, streets and public open spaces:
 - (a) the extent to which the height, location and design of the building allow reasonable sunlight and daylight access to:
 - (i) streets and public open spaces; and
 - (ii) adjoining sites, particularly those in residential zones;
 - (b) the extent to which the building avoids, remedies or mitigates any potential loss of privacy for surrounding properties (particularly those in residential zones);
 - (c) whether there is an operational, technical or locational need to exceed height and/or height in relation to boundary standard/s; and
 - (d) the extent to which adverse effects of the visual dominance of the building on the surrounding area (including roads) are avoided, remedied or mitigated having regard to the amenity and character of the surrounding area and the functional and operational needs of the facility.
- (4) the visual effects of the building design and external appearance on the amenity of private properties, streets and public open spaces:
 - (a) the extent to which the building design and external appearance avoids, remedies or mitigates adverse effects on the surrounding area having regard to all of the following:
 - (i) the amenity values and character of the surrounding area;
 - (ii) the functional and operational requirements of the precinct;
 - (iii) whether crime prevention through environmental design (CPTED) principles have been integrated into external building and layout design;
 - (iv) whether long unrelieved frontages and excessive bulk and scale when viewed from the public realm and residential zones have been avoided;

- (v) whether mechanical and electrical equipment has been integrated into the building design as far as is practicable;
- (vi) whether quality, durable, fit for purpose and easily maintained materials have been used for building design and construction; and,
- (vii)whether landscape design is utilised to enhance the visual appearance of the development, including around parking areas and service areas.
- (5) the visual effects of rubbish and storage areas on residential and open space zoned sites:
 - (a) the extent to which screening is practicable; and
 - (b) the extent to which distance and topographical matters mitigate likely adverse visual effects.

I411.9. Special information requirements

There are no special information requirements for this precinct.

I411.10. Precinct plans

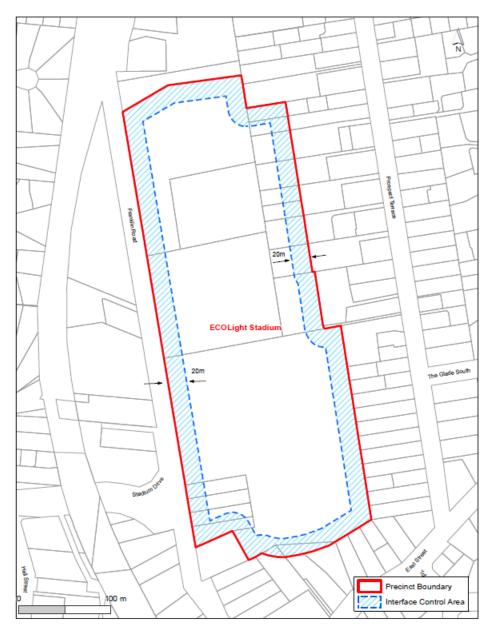

I411.10.1. ECOLight Stadium: Precinct plan 1